













ANTENNAS | OMNI-296

OMNI-296: DUAL BAND WI-FI ANTENNA

2400-2500, 3300-3800 & 5000-6000 MHZ MEDIUM GAIN OMNI-DIRECTIONAL ANTENNA



Product Overview

| | | | | | |
|---|--|---|---|---|---|
|  2400 - 2500, 3300 - 3800 & 5000 - 6000MHz |  7.5 dBi |  VSWR < 2.5:1 |  |  Increase x Mb/s |  |
|  -40°C to +70°C |  IP 65 |  UL 94 V-0 |  |  |  |

- Dual band medium gain 2.4 GHz and 5 GHz Wi-Fi antenna
- Compliant with IEEE 802.11a, 802.11b, 802.11g, 802.11n, 802.11ac wireless standard
- This antenna also works at the Wi-Fi/WiMax/LTE 3.3GHz-3.8GHz frequencies with a max gain of 7.5dBi
- Vandal and water resistant enclosure

The Dual-Band Wi-Fi Omni directional antenna, developed by Poynting Antennas, can connect to any Wi-Fi access point whether it is older Wi-Fi technology or new dual band Wi-Fi technology. These antennas can resolve channel saturation and provide the ultimate in Wi-Fi performance and flexibility. This means the antenna can be used for point to point links where there is abundance of RF noise and also cluttered environments.

The antenna operates in two frequency bands 2.4 GHz and 5 GHz, offering excellent utilization of the radio spectrum. This Antenna has a maximum 6dBi gain at 2.4GHz band and 7.5dBi gain at the 5GHz band, which offers the best performance with reliable connections. The housing is made of ABS which is high impact resistant plastic and is also resistant to acids and other chemicals that may occur in industrial plants. The antenna has a N-Type female connector at its base which can be terminated to a cable of the desired type and length.


Application areas


- Small business
- Building sites
- Factories
- Open mine sites
- Production facilities
- M2M
- Wi-Fi/WiMax/LTE 3.3GHz - 3.8GHz applications
- Areas with large amounts of machinery (cluttered environment)



Frequency bands


The OMNI-296 works on the 2400 - 2500 MHz and 5000 - 5800 MHz bands

 Indicates the bands on which this antenna works

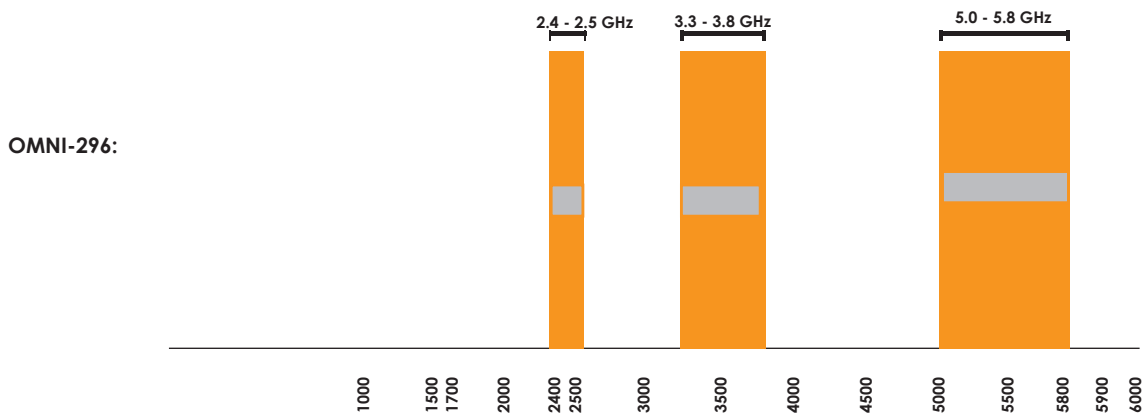

Antenna Performance Plots

VSWR:

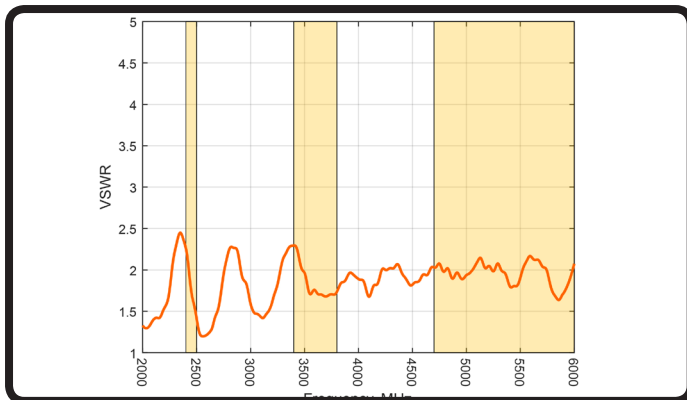


Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-296 delivers superior performance across all bands with a VSWR of 2.5:1 or better.

*VSWR measured with 1m low loss cable

Gain: (excluding cable loss)

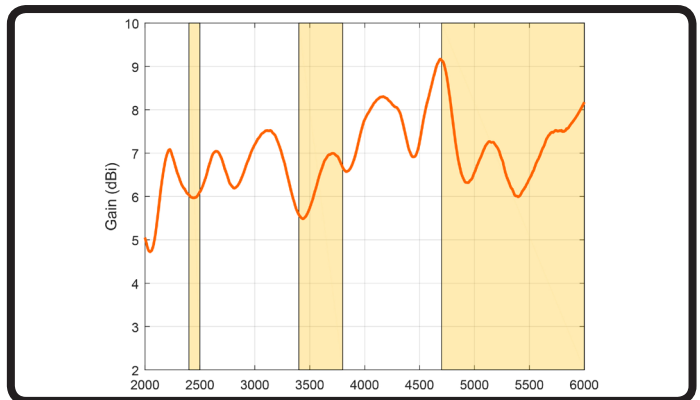

Gain* in dBi

7.5 dBi is the peak gain across all bands from 2.4 - 6 GHz

Gain @ 2400 - 2500 MHz:

6 dBi


Gain @ 5000 - 6000 MHz:

7.5 dBi


*Antenna gain measured with polarisation aligned standard antenna

Radiation Patterns


H-Plane: 2400 - 2500 MHz

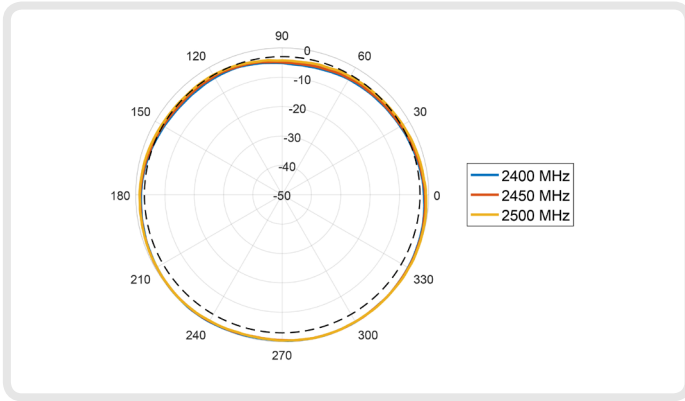


E-Plane: 2400 - 2500 MHz

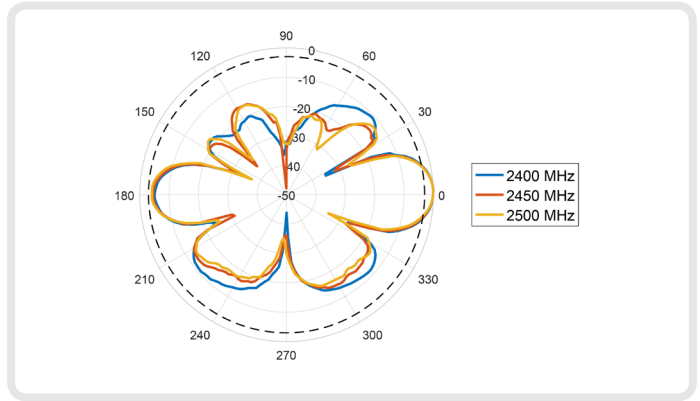


H-Plane: 3300 - 3800 MHz

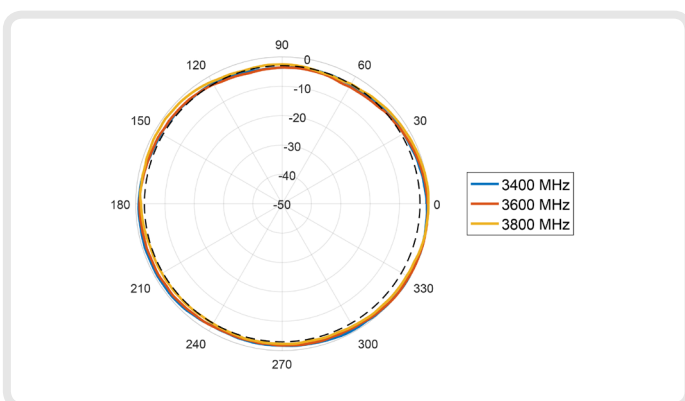


E-Plane: 3300 - 3800 MHz

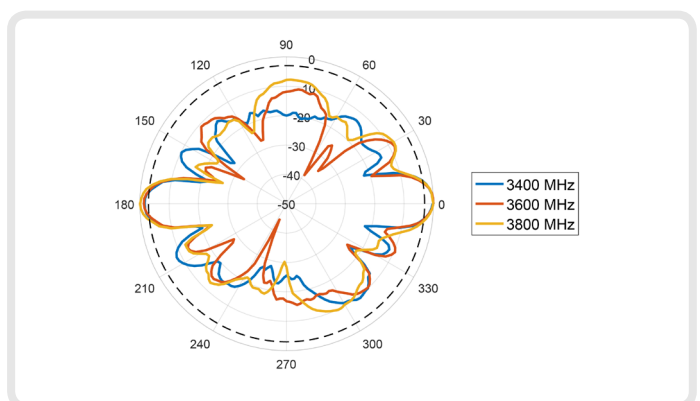

H-Plane: 4700 - 5800 MHz

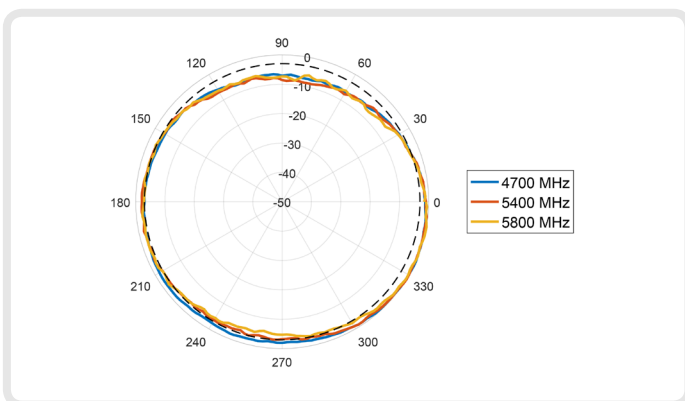

E-Plane: 4700 - 5800 MHz

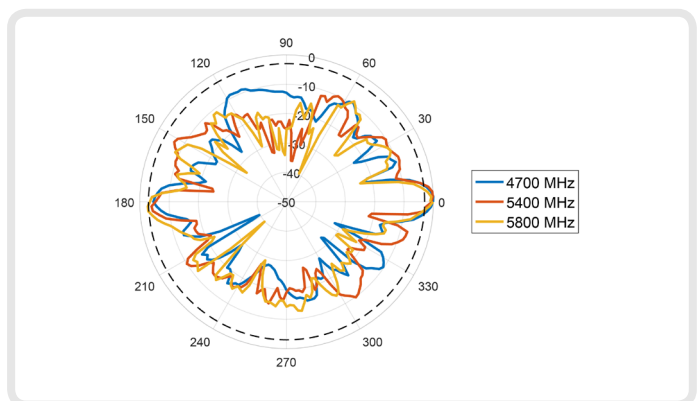

Electrical Specifications

| | |
|----------------------|---|
| Frequency Bands: | 2400 - 2500 MHz 3300 - 3800 MHz 5000-6000 MHz |
| Gain (Max): | 7.5 dBi |
| VSWR: | <2.5:1 |
| Feed Power Handling: | 10 W |
| Input impedance: | 50 Ohm (nominal) |
| Polarisation: | Linear Vertical |
| Cable loss: | Optional Cable dependant |
| Path to ground: | Yes |
| Cable Length: | N/A |
| Cable Type: | N/A |
| Connector: | N-Type Female |
| Beamwidth: | 2400 - 2500 MHz: 21° 3300 - 3800 MHz: 15° 4700 - 5800 MHz: 6° |

Environmental Specifications

| | |
|--------------------------------|----------------------------|
| Wind Survival: | 160 km/h |
| Temperature Range (Operating): | -40°C to +70°C |
| Environmental Conditions: | Outdoor/Indoor |
| Operating Relative Humidity: | Up to 98% |
| Storage Humidity: | 5% to 95% - non condensing |
| Storage Temperature: | -40°C to +70°C |

Ordering Information

| | |
|---------------------|---------------|
| Commercial name: | OMNI-296 |
| Order Product Code: | A-OMNI-0296 |
| EAN number: | 0707273469694 |

Additional Accessories Available

| | |
|-------------------|-------------------|
| Extension Cables: | Up to 15m HDF 195 |
|-------------------|-------------------|

Various connectors available

Installation poles and brackets available

For more detailed information and availability in your region, visit our web site: www.poyntingcommercial.com

Contact Poynting

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park
Landmarks Avenue,
Samrand, 0157
South Africa

Phone: +27 (0) 12 657 0050

E-mail: sales@poynting.co.za

Mechanical Specifications

| | |
|---------------------------------|--|
| Product Dimensions (L x W x D): | 485 mm x 75 mm x 75mm |
| Packaged Dimensions: | 510 mm x 95 mm x 90 mm |
| Weight: | 0.75 kg |
| Packaged Weight: | 0.91 kg |
| Radome Material: | ABS (Halogen Free) |
| Radome Colour: | Pantone - Cool Gray (1c) RAL - 7047 |

Product Box Contents

| | |
|-------------------|---|
| Antenna: | A-OMNI-0296 |
| Mounting Bracket: | Pole up to 50mm diameter Wall and Pole mount stainless steel bracket |

The connector is factory mounted to the antenna



A-OMNI-0296



Certification Approvals and Standards

| | |
|--|--|
| Flammability rating: | UL 94-V1 |
| Water Ingress Protection Ratio/Standard: | IP 65 |
| Impact resistance: | IK 08 |
| Salt Spray: | MIL-STD 810F/ASTM B117 |
| Product Safety: | Complies with UL, CE, EN, CSA and IEC standards |

