


ANTENNAS | HELI-8

2400 – 2500 MHz HIGH GAIN MINE/TUNNEL ANTENNA



- **Circular polarised helical antenna**
- **Wi-Fi compatible**
- **Bi-directional**
- **Ruggedised**
- **Future proof**

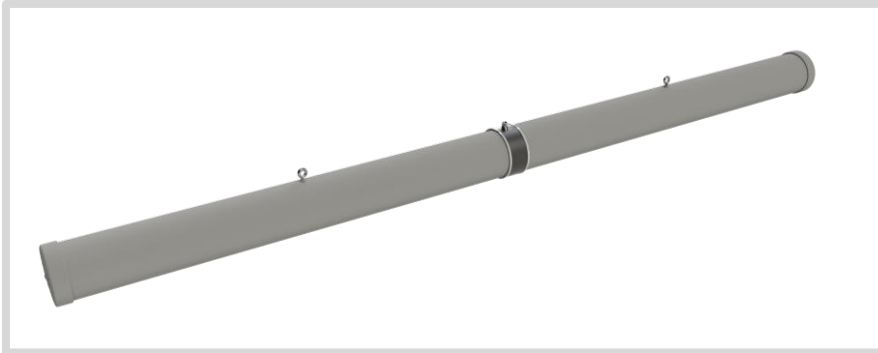

Mining



Tunnelling



Urban



MASC

APPLICATION AREAS

Product Overview


This high gain directional antenna compliments our Wi-Fi MinePoynt tunnel and mine antennas. The combination of MinePoynt beam antennas for long distance thru-tunnel links with this directional antenna, exploits Poynting's fifteen years' experience in designing and manufacturing antennas for underground mining data networks. This antenna is also suitable for oil/gas chemical environments where IS equipment is required. The HELI 8 tunnel antenna is the ideal antenna for 2.4-2.5 GHz wireless applications in tunnels. In tests, both the data rate and range achieved with this antenna was greater than obtained when using linearly polarized panel antennas of the same gain. The hardy construction of this antenna makes it ideal for the mining environment. A-HELI-0008 is a Bi-directional antenna whilst the closely related A-HELI-0003 fires in one direction. This antenna gives you a low-cost network infrastructure for current voice and data needs in mines and tunnels.

Features

- Proven antenna performance giving maximum range in all directions
- Ideal where the other devices used polarisation could change
- High gain over the 2400 MHz Wi-Fi band
- Versatile installation mounting options
- Lightweight


Application Areas

- Supplementing fiber/cable networks by providing wireless "Hotspots" to areas to enhance mobility or extend networks to inaccessible areas such as mines and tunnels
- Underground telemetry
- Creation of complete in tunnel/mine wide data networks and or internet connectivity
- Seamless connection to personnel using VOIP phones, smart devices and tablets
- M2M applications

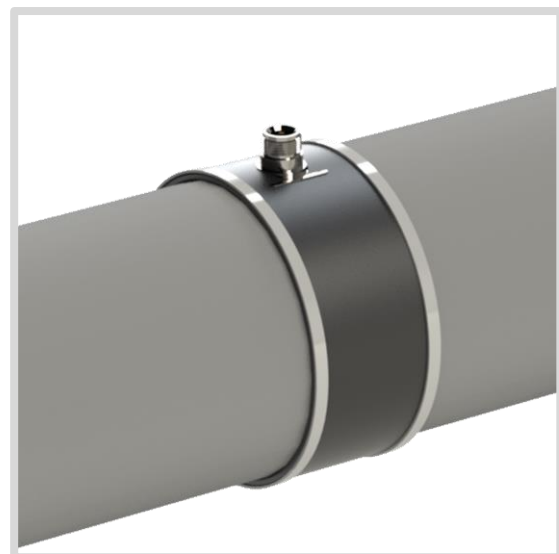


Frequency Bands

The HELI-8 is a wide-band antenna that works from 2400 – 2500 MHz

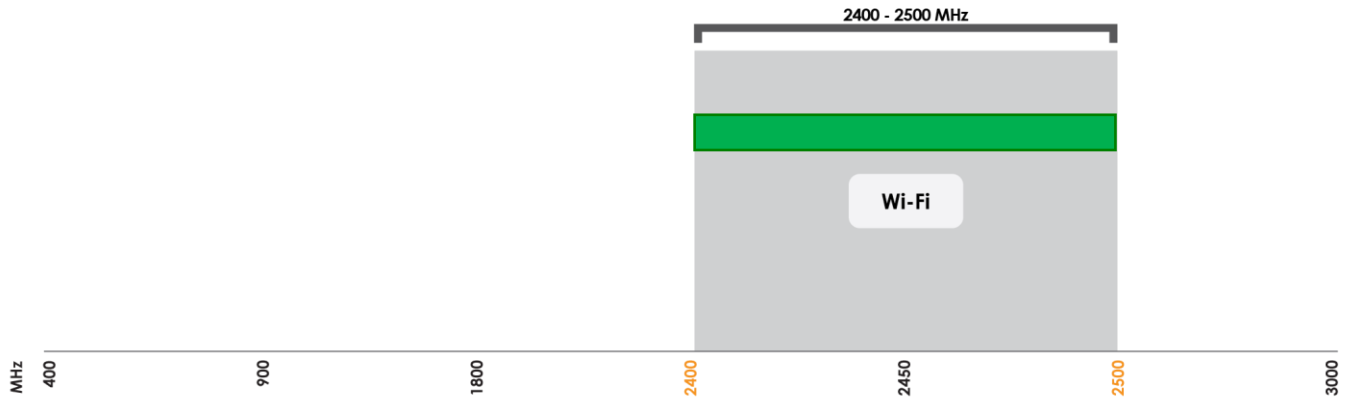

 Indicates the WIFI bands on which HELI-8 works

Antenna Overview

	
Ports	1
SISO / MIMO	SISO
Frequency Bands	2400 - 2500 MHz
Peak Gain	14 dBi
Coax Cable Type	N/A
Coax Cable Length	N/A
Connector Type	N-type(f)

Electrical Specifications

Frequency bands:	2400-2500 MHz
Gain (max):	14 dBi
VSWR:	<3:1
Feed power handling:	30 W
Input impedance:	50 Ohm (nominal)
Polarisation:	Left-Hand Circular
DC short:	No

Coax Cable & Connector Type

Cable length:	Up to 15m HDF 195 (extension)
Coax cable type:	N/A
Connector type:	N-type solder Jack, panel mount

**The coax cable & connector is factory mounted to the antenna*

Product Box Contents

Antenna:	A-HELI-0008
Mounting bracket:	Four 6mm eyebolts for ceiling mount

Ordering Information

Commercial name:	HELI-8
Order product code:	A-HELI-0008
EAN number:	0707273468765

Mechanical Specifications

Product dimensions	2050 mm x 140 mm x 140 mm
Packaged dimensions:	2100 mm x 150 mm x 190 mm
Weight:	5.1 kg
Packaged weight:	6.02 kg
Radome material:	PVC
Radome colour:	429C RAL 7038
Mounting Type:	Ceiling Mount


Environmental Specifications, Certification & Approvals

Wind Survival:	<120 km/h
Temperature Range (Operating):	-20°C to +70°C
Environmental Conditions:	Outdoor/Indoor
Water ingress protection ratio/standard:	IP 65
Salt Spray:	MIL-STD 810F /ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-20°C to +70°C
Enclosure Flammability Rating:	UL 94-HB
Impact resistance:	IK 08
Product Safety & Environmental:	Complies with CE and RoHS standards




Antenna Performance Plots

VSWR

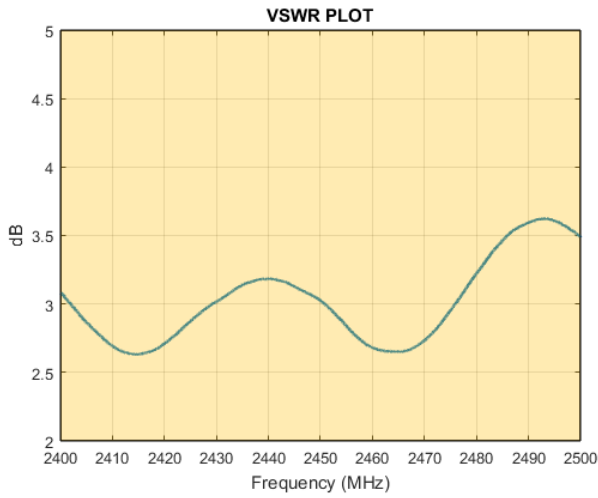

GAIN (EXCLUDING CABLE LOSS)

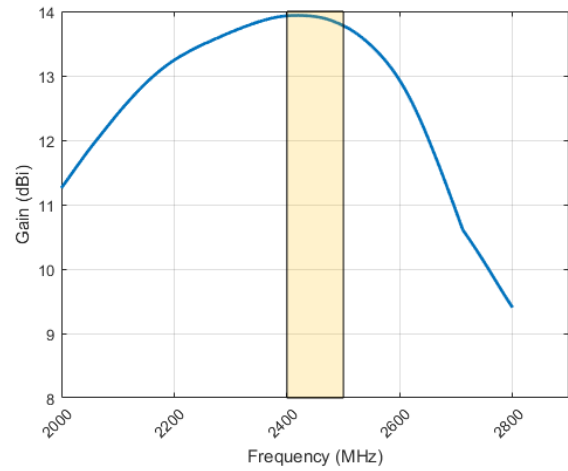

Voltage Standing Wave Ratio (VSWR)

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The HELI-8 delivers superior performance across all bands with a VSWR of 3:1 or better across 90% of the bands.

Gain* in dBi


14 dBi is the peak gain across all bands from 2400 – 2500 MHz

Gain @ 2400 – 2500 MHz: 14 dBi

**Antenna gain measured with polarisation aligned standard antenna*

Radiation Patterns

Azimuth & Elevation: 2400 – 2500 MHz

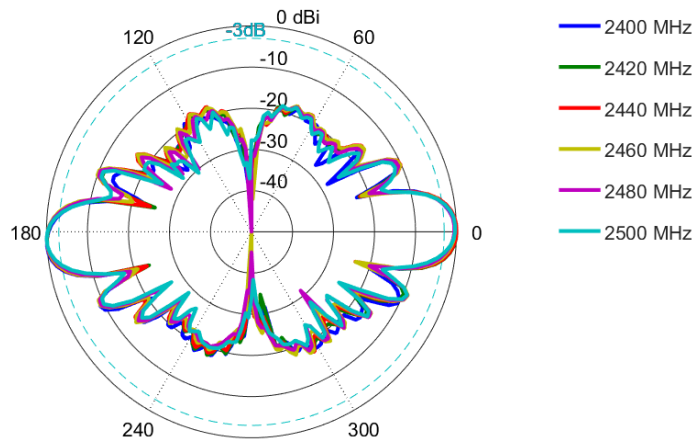

Contact Poynting

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park
Landmarks Avenue,
Samrand, 0157
South Africa

Phone: +27 (0) 12 657 0050

E-mail: sales@poynting.co.za

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 208026538

E-mail: sales-europe@poynting.tech